# **RF Dual Color Wall Mounted Controller**

09.284CE.04714









Important: Read All Instructions Prior to Installation

#### **Function introduction**

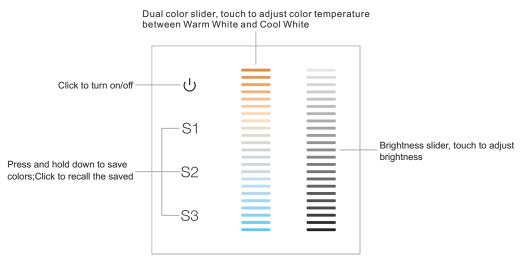

Front side

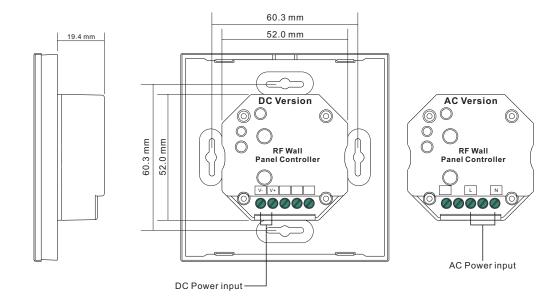

**Product Data** 


	DC Version	AC Version
Output Signal	RF signal	RF signal
Power Supply	12-24VDC	100-240VAC
Power consumption	20 mA	20 mA
Operating temperature	0-40°C	0-40°C
Relative humidity	8% to 80%	8% to 80%
Dimensions	86x86x29.1mm	86x86x29.1mm


- Touch sensitive
- · Glass interface(white & black)
- Compatible with all universal series RF receivers, radio frequency: 869.5/434MHz
- · Control CCT color
- · Control 1 zone of RF receiver
- Waterproof grade: Ip20

# Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

# Wiring diagram

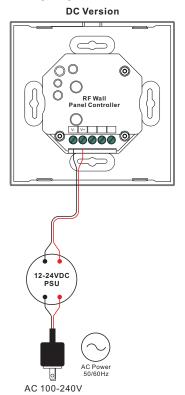



Back side

### Pair with RF receivers:

Turn on the wall panel controller  $\rightarrow$  Click "Learning Key"  $\rightarrow$  Touch color slider  $\rightarrow$  LED lights connected with the panel controller  $\rightarrow$  on RF receiver on RF remote

The receiver is paired with the remote successfully.

How to delete the pairing:

Press and hold down "Learning Key" on the receiver for over 3 seconds until connected LED lights flicker twice, which means the pairing is deleted successfully.

#### Installation

